



EnviroLogicIQ IP CAMERA

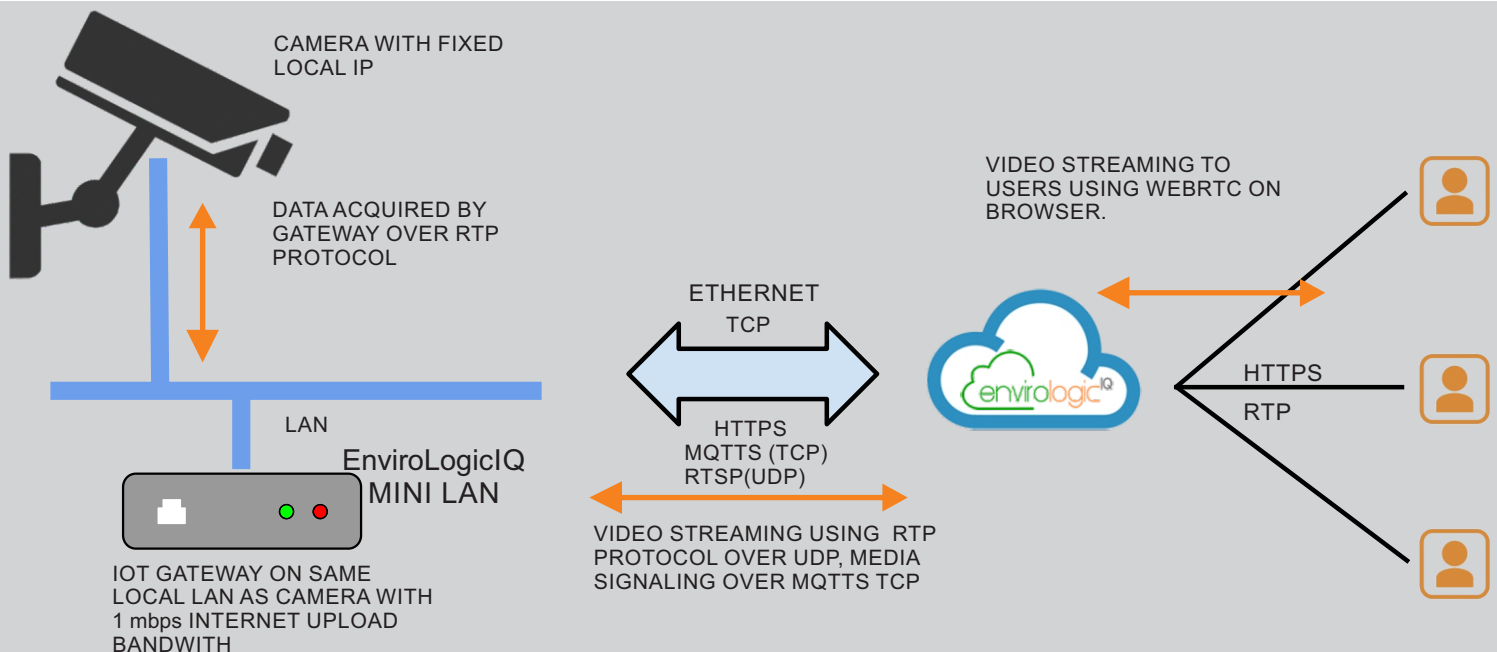

Features	
Signal	Pal/NTSC
Image Sensor	1/3" CMOS
Effective Pixels	1280*960
Horizontal Resolution	960P
Minimum Illumination	Color to B/W, Color: 0.1Lux, B/W: 0.01Lux
S/N Ratio	>60d/B (Enhanced)
Backlight Compensation	On/Off
White Balance	Auto
Electronic Shutter	PAL: 1/25~1/100000s NTSC:1/30~1/100000s
Focus Length	5 ~ 50mm
Focus	Auto/Manual/Push Auto
Optical Focus	10X
Presets	255
IR Distance	50m
Protection Level	IP67
Patrol Track	4 groups, each can record 200 actions
Rotational Speed	Horizontal and vertical max 200°/s
Rotational Range	Horizontal 360° , vertical 90° , auto reversal
Video Compression	H-264 main profile encoding, MJPEG/JPEG baseline encoding
Audio Compression	G.711, G.726
Primary Stream	1280x960, 25fps
Secondary Stream	DI, VGA, 640x360, 568x320, CIF, QVGA, 320x192
Video Bit Rate	32Kbps-16Mbps continuously adjustable, support CBR/VBR
Network Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SMTP, UPNP
ONIVF Support	Supported
Power Supply	DC12V/3A
Work Environment	-20°C~ +50°C, < 95% RH

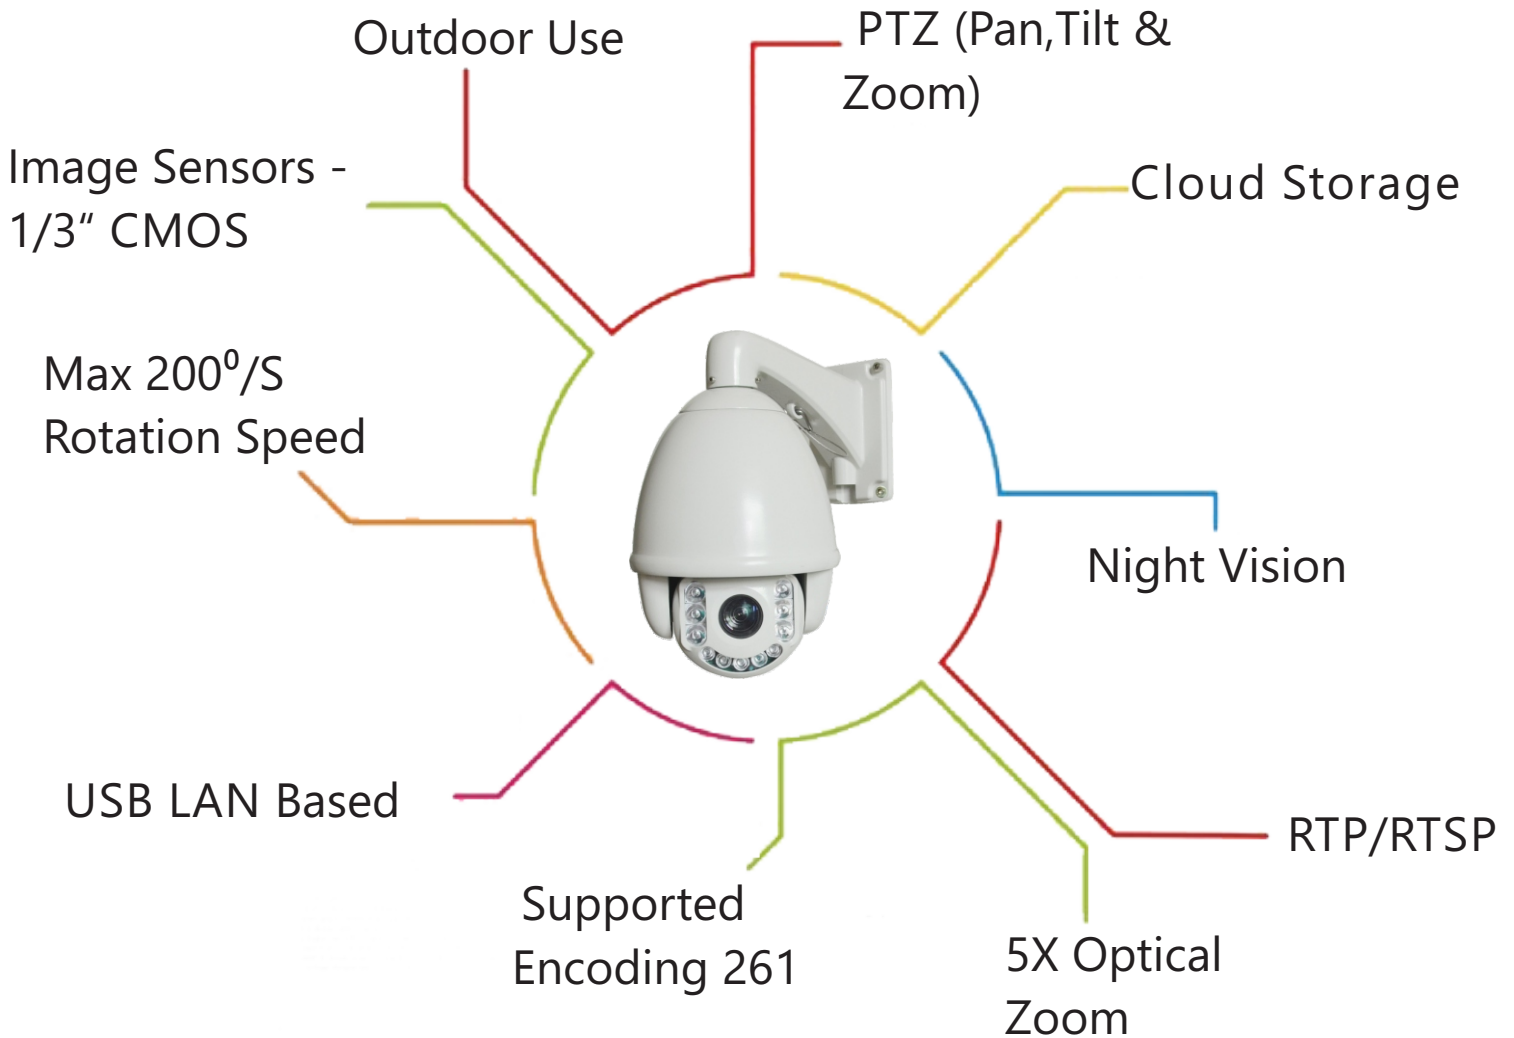